


Our secure Web-hosted infrastructure and centralized online administration reduce your IT costs and allow you to easily manage all of your access points in a single location. C3-400 versatile design features take care of present and future needs with ease and efficiency. It is one of the most rugged and reliable controllers on the market, with a multitude of built-in features.

The C3-400 control panel can communicate at 38.4 Kbps via RS-485 configuration or Ethernet TCP/IP networks. It can store up to 30,000 cardholders. SDK (Software Development Kit) is available for the customer to integrate the controller into existing access control software or to develop new software.

C3-400

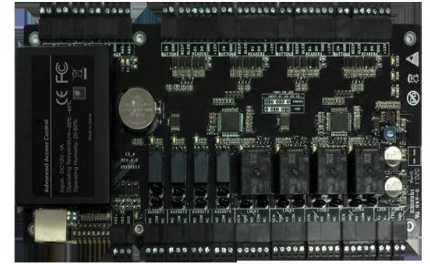

SPECIFICATION

Number of Doors Controlled	4 Door
Number of Readers Supported	4
Types of Readers Supported	26-bit Wiegand, others upon request
Number of Inputs	12 (4 Exit Device, 4 Door Status, 4 AUX)
Number of Outputs	8 (4-Form C Relay for Lock and 4-Form C Relay for Aux Output)
Card Holders Capacity	30,000
Log Events Capacity	100,000
Weight	7.8lbs (3.55kg)
Communication	TCP/IP and RS-485
Enclosure	Powder Coated Aluminum
Mounting	Wall Mount
Recommended Power Supply	12V DC, 1.5A
Dimensions (Bundle Only)	15in.×3.15in.×11in. 380mm(L)×80mm(W)×280mm(H)
Dimensions (Board Only)	6.3in.×4.17in.(160mm×106mm)

Configuration:-

